



FILMTEC Membranes

FILMTEC Tape-Wrapped 2540 Elements for Commercial Applications

Features

A complete range of FILMTEC™ 2540-size elements is available to meet a wide variety of customer needs for commercial applications, from the highest purity water to the lowest total system costs.

- FILMTEC XLE-2540 is the most productive, lowest pressure RO membrane available, delivering the lowest total system cost.
- FILMTEC LP-2540 delivers high quality water at low pressure operation. The LP-2540 replaces many “first generation” low pressure membrane elements and will purify more water in many older systems, especially on cold water feeds.
- FILMTEC TW30-2540 is the industry standard for reliable operation and production of the highest quality water.


Tape-wrapped elements are built with the same high quality membranes and materials of construction as industrial elements, without the hard outershell. This makes them more economical for commercial systems with one or two elements per housing.

Product Specifications

Product	Part Number	Active Area ft ² (m ²)	Applied Pressure psig (bar)	Permeate Flow Rate gpd (m ³ /d)	Stabilized Salt Rejection (%)
XLE-2540	154543	28 (2.6)	100 (6.9)	850 (3.2)	99.0
LP-2540	231653	28 (2.6)	145 (10)	850 (3.2)	99.2
TW30-2540	80643	28 (2.6)	225 (15.5)	850 (3.2)	99.5

1. Permeate flow and salt rejection based on the following test conditions: 77°F (25°C), 15% recovery and the specified applied pressure. TW30-2540 is tested on a 2,000 ppm NaCl feed stream. LP-2540 and XLE-2540 are tested on a 500 ppm NaCl feed stream.
2. Permeate flows for individual elements may vary +/-20%.
3. LP-2540 can replace TW30HP-2540 for low pressure operation.
4. For the purpose of improvement, specifications may be updated periodically.

Figure 1

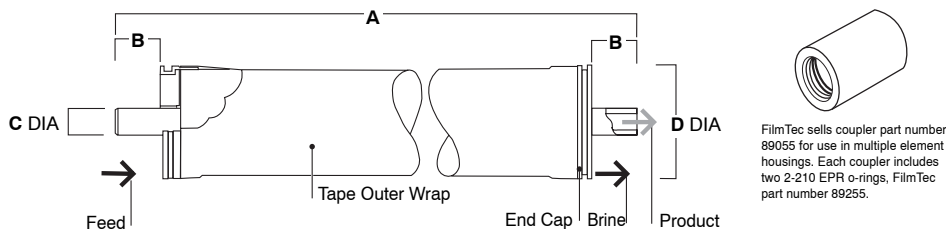

Dimensions – Inches (mm)

Product	A	B	C	D
XLE-2540	40.0 (1,016)	1.19 (30.2)	0.75 (19)	2.4 (61)
LP-2540	40.0 (1,016)	1.19 (30.2)	0.75 (19)	2.4 (61)
TW30-2540	40.0 (1,016)	1.19 (30.2)	0.75 (19)	2.4 (61)

1. Refer to FilmTec Design Guidelines for multiple-element systems.
 2. TW30-2540, LP-2540 and XLE-2540 elements fit nominal 2.5-inch I.D. pressure vessels.
- 1 inch = 25.4 mm

Operating Limits

- Membrane Type Polyamide Thin-Film Composite
- Maximum Operating Temperature^a 113°F (45°C)
- Maximum Operating Pressure 600 psig (41 bar)
- Maximum Feed Flow Rate 6 gpm (1.4 m³/hr)
- Maximum Pressure Drop 13 psig (0.9 bar)
- pH Range, Continuous Operation^a 2 – 11
- pH Range, Short-Term Cleaning (30 min.)^b 1 – 12
- Maximum Feed Silt Density Index SDI 5
- Free Chlorine Tolerance^c <0.1 ppm

^a Maximum temperature for continuous operation above pH 10 is 95°F (35°C).

^b Refer to Cleaning Guidelines in specification sheet 609-23010.

^c Under certain conditions, the presence of free chlorine and other oxidizing agents will cause premature membrane failure. Since oxidation damage is not covered under warranty, FilmTec recommends removing residual free chlorine by pretreatment prior to membrane exposure. Please refer to technical bulletin 609-22010 for more information.

Important Information

Proper start-up of reverse osmosis water treatment systems is essential to prepare the membranes for operating service and to prevent membrane damage due to overfeeding or hydraulic shock. Following the proper start-up sequence also helps ensure that system operating parameters conform to design specifications so that system water quality and productivity goals can be achieved.

Before initiating system start-up procedures, membrane pretreatment, loading of the membrane elements, instrument calibration and other system checks should be completed.

Please refer to the application information literature entitled "Start-Up Sequence" (Form No. 609-00298) for more information.

Operation Guidelines

Avoid any abrupt pressure or cross-flow variations on the spiral elements during start-up, shutdown, cleaning or other sequences to prevent possible membrane damage. During start-up, a gradual change from a standstill to operating state is recommended as follows:

- Feed pressure should be increased gradually over a 30-60 second time frame.
- Cross-flow velocity at set operating point should be achieved gradually over 15-20 seconds.
- Permeate obtained from first hour of operation should be discarded.

General Information

- Keep elements moist at all times after initial wetting.
- If operating limits and guidelines given in this bulletin are not strictly followed, the limited warranty will be null and void.
- To prevent biological growth during prolonged system shutdowns, it is recommended that membrane elements be immersed in a preservative solution.
- The customer is fully responsible for the effects of incompatible chemicals and lubricants on elements.
- Maximum pressure drop across an entire pressure vessel (housing) is 30 psi (2.1 bar).
- Avoid static permeate-side backpressure at all times.

FILMTEC Membranes

For more information about FILMTEC membranes, call the Dow Liquid Separations business:

North America: 1-800-447-4369
Latin America: (+55) 11-5188-9222
Europe: (+32) 3-450-2240
Pacific (ex. China): +800-7776-7776
China: +10-800-600-0015
<http://www.filmtec.com>

Notice: The use of this product in and of itself does not necessarily guarantee the removal of cysts and pathogens from water. Effective cyst and pathogen reduction is dependent on the complete system design and on the operation and maintenance of the system.

Notice: No freedom from any patent owned by Seller or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other governmental enactments. Seller assumes no obligation or liability for the information in this document. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.

